T7824

VivoTab 使用手冊

華碩電腦一直致力於創造對環境友善的產品與包裝，以及保護消費者的健康，期望達到對環境的衝擊與傷害降至最低。為了減少使用會對環境造成傷害的物質，本產品將減少使用手冊的頁數來降低碳的排放量。

請造訪華碩產品支援網站 http://support.asus.com/，或參考產品內的使用手冊，可以獲得更詳細的使用手冊與相關資訊。

為電池充電

若是您想要在外出時長時間使用電池電源，請務必在使用前將電池完全充飽。當 VivoTab 透過電源充電器供電，同時也會為電池充電。若是 VivoTab 在開機使用的情況下，將耗費更長的時間才能將電池充飽。

重要！請勿讓平板電腦完成充電後仍繼續連接電源。某些電子裝置並非設計為能夠超時連接電源。

航空器

若您想要在乘坐飛機的飛行過程中使用 VivoTab，請先與航空公司之人員確認相關資訊。部份航空公司訂定有電子產品的使用規定，並禁止於飛機起降時使用電子產品。

重要！VivoTab 可以接受 X 光掃描儀器之檢查（需將物品放置於輸送帶上），但請勿讓 VivoTab 接受磁性探測器及手持金屬探測器的檢查。

安全說明

平板電腦只應在溫度為 0℃（32℉）至 35℃（95℉）的環境下使用。

包裝盒內容物

VivoTab

USB 電源充電器

Micro USB 電源線

使用手冊及產品保固卡

專用拭鏡布

Micro SIM 卡托架退出器

說明：

- 若是任何一項配件有損壞或短缺，請儘速與您的經銷商連絡。
- 電源插頭的款式將依區域而異。

認識您的 VivoTab

前視圖



1 前置相機鏡頭
內建的相機鏡頭可以截取靜態與動態影像、召開視訊會議等。

2 相機指示燈
當您使用相機鏡頭拍攝照片或錄製影片時相機指示燈將會亮起。

3 燈光感應器
燈光感應器可自動感應環境光源並調整液晶顯示螢幕的亮度。

4 **觸控螢幕**
您可以使用多點觸控功能於觸控螢幕上操作VivoTab。

5 **Windows® 8 觸控按鈕**
點選此觸控按鈕可返回主畫面，若裝置已在主畫面則可回到最近使用的應用程式主畫面。

後視圖

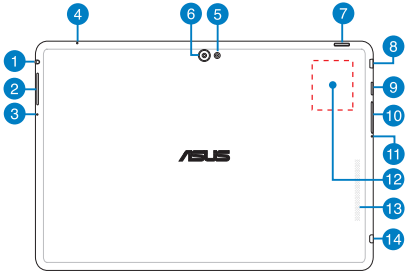

1 **耳機 / 麥克風插孔**
此立體聲耳機插孔可將 VivoTab 中的音效訊號輸出至擴大機喇叭或耳機。此插孔亦可連接麥克風以使用談話、錄音等功能。

重要！關於麥克風音訊輸入功能，VivoTab 僅支援使用耳機麥克風。

2 **音量調整按鈕**
按下此按鈕以增加或降低音量。

3 **重置孔**
當 VivoTab 沒有反應時，使用迴紋針按壓重置孔可強制重新開機。

重要！強制重新開機可能會造成資料毀損，建議您定期備份系統中的重要資料。

4 **麥克風**
內建的單聲道麥克風可使用於視訊會議、談話、錄音等。

5 **相機閃光燈**
拍照時若光線不足請使用閃光燈。

您可以對閃光燈進行以下設定：

設定	功能
自動	當使用相機時，系統將依據環境光源情形自動開啟/關閉閃光燈
開啟	使用相機拍照時開啟閃光燈
保持開啟	使用相機拍照或錄影時閃光燈持續開啟
關閉	閃光燈關閉

6 **後側相機鏡頭**

內建的相機鏡頭可以截取靜態與動態影像、召開視訊會議。

7 **電源按鈕**

按下此按鈕以開啟 / 關閉 VivoTab 電源。電源開啟時按下電源按鈕可使 VivoTab 進入休眠模式，再按一下電源按鈕可將 VivoTab 由休眠模式喚起。

當 VivoTab 沒有反應時，按住電源按鈕 5 秒可強制關機。

重要！強制重新開機可能會造成資料毀損，建議您定期備份系統中的重要資料。

電池充電指示燈

雙色電池充電指示燈會顯示電池電力狀態，說明如下：

指示燈顏色	電力狀態
白燈	電池充電完成
橘燈	電池充電中
熄滅	VivoTab 未連接電源充電器

8 **Micro HDMI 連接埠**
此插槽用以連接 micro HDMI 訊號線以使用 HDMI（High-Definition Multimedia Interface，高解析度多媒體介面）裝置。

9 **MicroSD 記憶卡插槽**
此插槽用以安裝 microSD 記憶卡。

10 **Micro SIM 卡插槽**
此插槽可安裝 micro SIM 卡。

說明：請參考 **安裝 micro SIM 卡** 的說明。

11 **Micro SIM 卡退出孔**
請使用 micro SIM 卡托架退出器按壓此孔可退出 micro SIM 卡托架。

12 **近距離無線通訊（NFC，Built-in Near Field Communication）**
與其他具備 NFC 功能的裝置接觸此區域可立即分享檔案或應用程式等。

⑬ **音效喇叭**

內建的音效喇叭系統讓您無需連接額外裝置，便能聽見聲音音效。音效功能可透過軟體控制。

⑭ **Micro USB 2.0/1.1 連接埠**

Micro USB 連接埠可連接電源充電器為 VivoTab 提供電源，或是為電池充電。

連接電源充電器

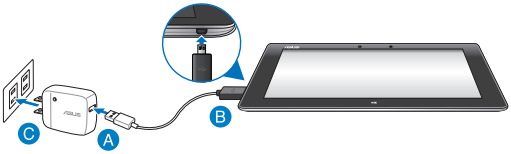

請依照以下步驟為 VivoTab 充電：

A 請將 micro USB 電源線 USB 埠連接 USB 電源充電器。

B 請將 micro USB 電源線 micro USB 埠連接 VivoTab 。

C 請將電源插頭連接至插座。

重要！

- 請使用包裝盒內容物中的電源充電器及 micro USB 電源線為 VivoTab 充電，使用其他電源充電器可能造成 VivoTab 故障。
- 在為 VivoTab 充電前，請先撕去 USB 電源充電器和 micro USB 電源線上的膠膜，以免造成危險。
- 本產品適用的電源輸入電壓範圍為 AC 100V - 240V，輸出電壓為 DC 5V, 2A。
- 請勿讓平板電腦完成充電後仍繼續連接電源。某些電子裝置並非設計為能夠超時連接電源。
- 當在充電模式下使用 VivoTab 時，請確認電源充電器是否已經連接至附近的電源插座。
- 初次使用 VivoTab 之前，請先將電池充電 8 小時以上。

安裝 micro SIM 卡

在使用 VivoTab 的行動網路功能前，請先安裝 micro SIM 卡 。

請依照以下步驟安裝 micro SIM 卡：

A. 請將 micro SIM 卡托架退出器插入退出孔，以退出 micro SIM 卡托架。

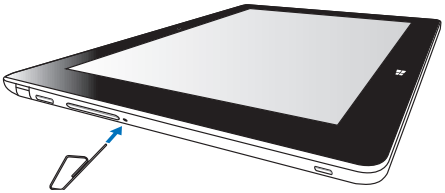

B. 如下圖所示的方向，將 micro SIM 卡的金色接腳朝下、SIM 卡的缺角朝右上方水平放置於托架上，與 VivoTab 平行，緩緩推入插槽內。

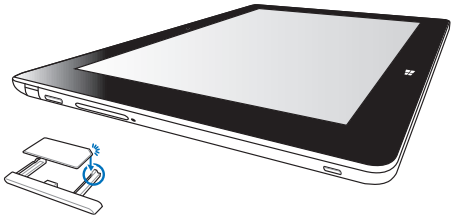

C. 請將 micro SIM 卡托架推入至插槽內。

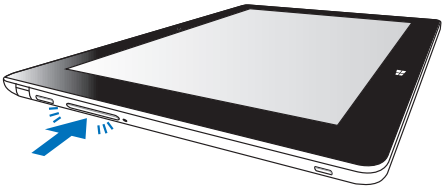

附錄

Federal Communications Commission Statement

This device complies with FCC Rules Part 15. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the Federal Communications Commission (FCC) rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by doing one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

RF Exposure Information (SAR)

THIS MODEL MEETS INTERNATIONAL GUIDELINES FOR EXPOSURE TO RADIO WAVES.

Your mobile device is a radio transmitter and receiver. It's designed not to exceed the limits for exposure to radio waves recommended by international guidelines. These guidelines were developed by the independent scientific organization ICNIRP and IEEE, and include safety margins designed to assure the protection of all persons, regardless of age and health.

The guidelines use a unit of measurement known as the Specific Absorption Rate or SAR. The FCC SAR limit in ANSI/IEEE C95.1 and OET Bulletin 65 Supplement C is 1.6 W/kg. The maximum SAR value for each frequency band is listed below:

ASUS VivoTab (FCC ID: MSQK0Y)

FCC SAR values

Band	Scaled SAR 1g (W/Kg)
GSM850	1.13
GSM1900	1.03
WCDMA Band V	1.06
WCDMA Band IV	1.30
WCDMA Band II	1.25
LTE Band 17	0.55
LTE Band 5	0.62
LTE Band 2	1.28
LTE Band 4	1.39
WLAN2.4G	1.11

Canada, Industry Canada (IC) Notices

This Class B digital apparatus complies with Canadian ICES-003 and RSS-210.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device. The IC ID for this device is 3568A-K0Y.

Radio Frequency (RF) Exposure Information

The radiated output power of the Wireless Device is below the Industry Canada (IC) radio frequency exposure limits. The Wireless Device should be used in such a manner such that the potential for human contact during normal operation is minimized.

This device has been evaluated for and shown compliant with the IC Specific Absorption Rate ("SAR") limits when installed in specific host products operated in portable exposure conditions.

Canada's REL (Radio Equipment List) can be found at the following web address:
http://www.ic.gc.ca/app/sitt/reltel/srch/nwRdSrch.do?lang=eng

Additional Canadian information on RF exposure also can be found at the following web address:
http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf08792.html

Canada, avis d'Industrie Canada (IC)

Cet appareil numérique de classe B est conforme aux normes canadiennes ICES-003 et RSS-210.

Son fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne doit pas causer d'interférence et (2) cet appareil doit accepter toute interférence, notamment les interférences qui peuvent affecter son fonctionnement. L'identifiant IC de cet appareil est 3568A-K0Y.

Informations concernant l'exposition aux fréquences radio (RF)

La puissance de sortie émise par cet appareil sans fil est inférieure à la limite d'exposition aux fréquences radio d' Industrie Canada (IC). Utilisez l'appareil sans fil de façon à minimiser les contacts humains lors du fonctionnement normal.

Ce périphérique a été évalué et démontré conforme aux limites SAR (Specific Absorption Rate – Taux d'absorption spécifique) d' IC lorsqu'il est installé dans des produits hôtes particuliers qui fonctionnent dans des conditions d'exposition à des appareils portables.

Ce périphérique est homologué pour l'utilisation au Canada. Pour consulter l'entrée correspondant à l'appareil dans la liste d'équipement radio (REL - Radio Equipment List) d'Industrie Canada rendez-vous sur:
http://www.ic.gc.ca/app/sitt/reltel/srch/nwRdSrch.do?lang=eng

Pour des informations supplémentaires concernant l'exposition aux RF au Canada rendez-vous sur :
http://www.ic.gc.ca/eic/site/smt-gst.nsf/eng/sf08792.html

EC Declaration of Conformity

This product is compliant with the regulations of the R&TTE Directive 1999/5/EC. The Declaration of Conformity can be downloaded from http://support.asus.com.

Limitation of Liability

Circumstances may arise where because of a default on ASUS' part or other liability, you are entitled to recover damages from ASUS. In each such instance, regardless of the basis on which you are entitled to claim damages from ASUS, ASUS is liable for no more than damages for bodily injury (including death) and damage to real property and tangible personal property; or any other actual and direct damages resulted from omission or failure of performing legal duties under this Warranty Statement, up to the listed contract price of each product.

ASUS will only be responsible for or indemnify you for loss, damages or claims based in contract, tort or infringement under this Warranty Statement.

This limit also applies to ASUS' suppliers and its reseller. It is the maximum for which ASUS, its suppliers, and your reseller are collectively responsible.

UNDER NO CIRCUMSTANCES IS ASUS LIABLE FOR ANY OF THE FOLLOWING: (1) THIRD-PARTY CLAIMS AGAINST YOU FOR DAMAGES; (2) LOSS OF, OR DAMAGE TO, YOUR RECORDS OR DATA; OR (3) SPECIAL, INCIDENTAL, OR INDIRECT DAMAGES OR FOR ANY ECONOMIC CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS OR SAVINGS), EVEN IF ASUS, ITS SUPPLIERS OR YOUR RESELLER IS INFORMED OF THEIR POSSIBILITY.

Prevention of Hearing Loss

To prevent possible hearing damage, do not listen at high volume levels for long periods.

A pleine puissance, l'écoute prolongée du baladeur peut endommager l'oreille de l'utilisateur.

For France, as required by French Article L. 5232-1, this device is tested to comply with the Sound pressure requirement in NF EN 50332-2:200 and NF EN 50332-1:20000 standards.

CE Mark Warning

CE

CE marking for devices without wireless LAN/ Bluetooth

The shipped version of this device complies with the requirements of the EEC directives 2004/108/EC "Electromagnetic compatibility" and 2006/95/EC "Low voltage directive".

RF Exposure information (SAR) - CE

This device meets the EU requirements (1999/519/EC) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The limits are part of extensive recommendations for the protection of the general public. These recommendations have been developed and checked by independent scientific organizations through regular and thorough evaluations of scientific studies. The unit of measurement for the European Council's recommended limit for mobile devices is the "Specific Absorption Rate" (SAR), and the SAR limit is 2.0 W/Kg averaged over 10 gram of body tissue. It meets the requirements of the International Commission on Non-Ionizing Radiation Protection (ICNIRP).

For next-to-body operation, this device has been tested and meets the ICNRP exposure guidelines and the European Standard EN 62311 and EN 62209-2. SAR is measured with the device directly contacted to the body while transmitting at the highest certified output power level in all frequency bands of the mobile device.

The maximum SAR value for each frequency band is listed below:

CE SAR values

Band	SAR 10g (W/Kg)
GSM900	1.05
GSM1800	0.79
WCDMA Band V*	0.51
WCDMA Band VIII	0.73
WCDMA Band I	1.38
LTE Band 20	0.63
LTE Band 3	1.07
LTE Band 7	0.71

* Not available in most European countries.

Power Safety Requirement

Products with electrical current ratings up to 6A and weighing more than 3Kg must use approved power cords greater than or equal to: H05VV-F, 3G, 0.75mm^2 or H05VV-F, 2G, 0.75mm^2.

ASUS Recycling/Takeback Services

ASUS recycling and takeback programs come from our commitment to the highest standards for protecting our environment. We believe in providing solutions for you to be able to responsibly recycle our products, batteries, other components as well as the packaging materials. Please go to http://csr.asus.com/english/Takeback.htm for detailed recycling information in different regions.

Coating notice

IMPORTANT! To provide electrical insulation and maintain electrical safety, a coating is applied to insulate the device except on the areas where the I/O ports are located.

廢棄物處理

電池如有更換不正確會有爆炸的危險，並請依照製造商說明書處理使用過的電池。

請勿將內含汞的電池當作一般垃圾丟棄。這個打叉的垃圾桶標誌表示電池不應視為一般垃圾丟棄。

請勿將本產品當作一般垃圾丟棄。本產品零組件設計為可回收利用。這個打叉的垃圾桶標誌表示本產品（電器與電子設備）不應視為一般垃圾丟棄，請依照您所在地區有關廢棄電子產品的處理方式處理。

請勿將電池存放靠近火源或是丟入燃燒的火堆中，有可能造成爆炸的意外。

低功率電波輻射性電機管理辦法

第十二條：經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條：低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。低功率射頻電機需忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

***減少電磁波影響，請妥適使用。**

版權說明

©ASUSTeK Computer Inc. All rights reserved. 華碩電腦股份有限公司保留所有權利

本使用手冊包括但不限於其所包含的所有資訊受到著作權法之保護，未經華碩電腦股份有限公司（以下簡稱「華碩」）許可，不得任意地仿製、拷貝、謄抄、轉譯或為其他利用。

Model name 型號：K0Y (ME400CL)

免責聲明

本使用手冊是以「現況」及「以目前明示的條件下」的狀態提供給您。在法律允許的範圍內，華碩就本使用手冊，不提供任何明示或默示的擔保及保證，包括但不限於商業適銷性、特定目的之適用性、未侵害任何他人權利及任何得使用本使用手冊或無法使用本使用手冊的保證，且華碩對因使用本使用手冊而獲取的結果或透過本使用手冊所獲得任何資訊之準確性或可靠性不提供擔保。

台端應自行承擔使用本使用手冊的所有風險。台端明確了解並同意，華碩、華碩之授權人及其各該主管、董事、員工、代理人或關係企業皆無須為您因本使用手冊、或因使用本使用手冊、或因不可歸責於華碩的原因而無法使用本使用手冊或其任何部分而可能產生的衍生、附隨、直接、間接、特別、懲罰或任何其他損失（包括但不限於利益損失、業務中斷、資料遺失或其他金錢損失）負責，不論華碩是否被告知發生上開損失之可能性。

由於部分國家或地區可能不允許責任的全部免除或對前述損失的責任限制，所以前述限制或排除條款可能對您不適用。

台端知悉華碩有權隨時修改本使用手冊。本產品規格或驅動程式一經改變，本使用手冊將會隨之更新。本使用手冊更新的詳細說明請您造訪華碩的客戶服務網 http://support.asus.com，或是直接與華碩資訊產品技術支援專線 0800-093-456 聯絡。

於本使用手冊中提及之第三人產品名稱或內容，其所有權及智慧財產權皆為各別產品或內容所有人所有且受現行智慧財產權相關法令及國際條約之保護。當下列兩種情況發生時，本產品將不再受到華碩之保固及服務：

（1）本產品曾經過非華碩授權之維修、規格更改、零件替換或其他未經過華碩授權的行為。
（2）本產品序號模糊不清或喪失。